



PIEZORESISTIVE PRESSURE TRANSMITTERS

SERIES 23SY / 25Y

ABSOLUTE AND GAUGE PRESSURE / ACCURACY 0,25 %FS

The Y-line transmitters have an extremely small temperature error. This is achieved using an additional circuit containing a temperature sensor that subdivides the temperature range into fields that are 1,5 Kelvin (K) wide. The TK zero and TK compensation values are calculated for each field and programmed into the additional circuit. During operation, these values are fed into the analogue signal path depending on the temperature. Each temperature is the «calibration temperature» for this transmitter. The accuracy thereof is mainly determined by linearity. 120 fields are available, representing a possible temperature range of 180 K. The wider the temperature range, the greater the amount of testing that is needed to minimise the inaccuracy of the mathematical model.

The Series 23SY / 25Y product line is outstanding due to its extreme ruggedness towards electromagnetic fields. The limits of the CE standard are undercut by a factor of up to 10 with conducted and radiated fields.



Series 23SY

- **Series 23SY** Ranges 0,1...1000 bar Fully welded (no internal seals)
- **Series 25Y** Ranges 0,5...1000 bar Flush, fully welded.

A Comprehensive Range


Absolute, barometric, gauge (positive and negative pressures). Many nominal pressure ranges. Current or voltage output.

Flexibility

A modular concept is used, with fast and economical production achieved by using off-the-shelf sensors. Numerous options and variations are available to meet customers' specific requirements: Pressure ranges, pressure ports, signal outputs, electrical connectors, etc.



Series 25Y

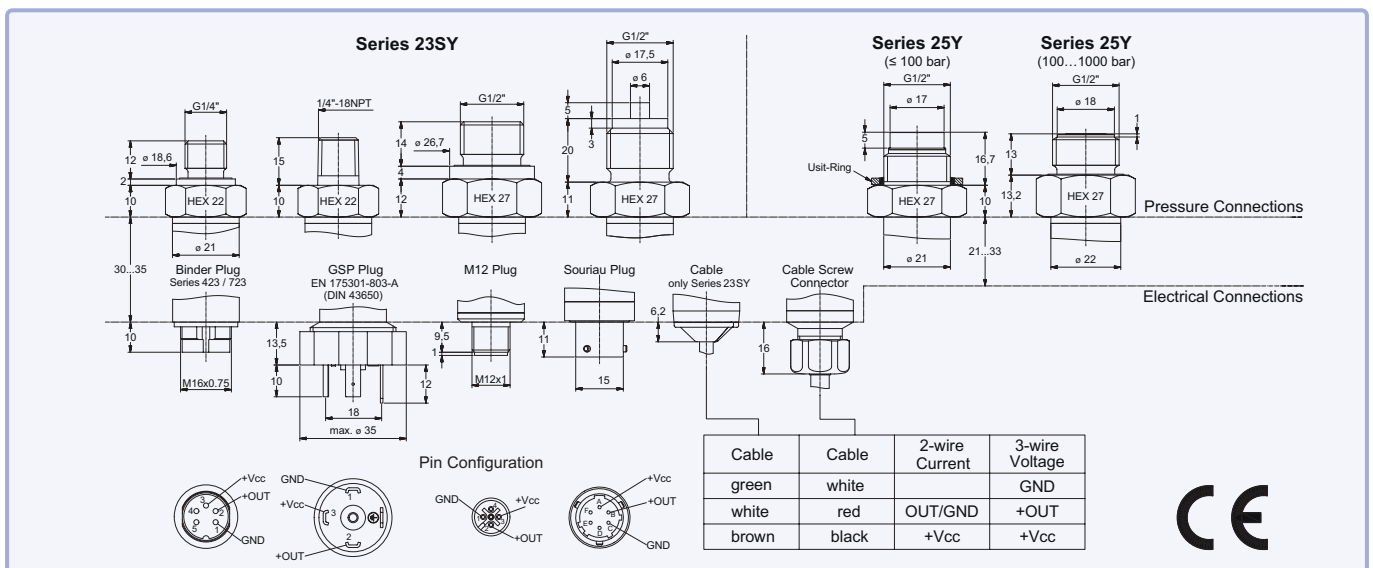

**Specifications**

Pressure Ranges (FS) in bar

PR-23SY	-1	-0,5	-0,2	-0,1	0,1	±0,1	0,2	±0,2	0,5	±0,5	1	±1	2	5	10	20						
PA-23SY	-1										1	±1	2	5	10	20	50	100	200	400	600	1000 ⁴⁾
PAA-23SY									0,5		1		2	5	10	20	50	100	200	400	600	1000 ⁴⁾
PR-25Y	-1	-0,5							0,5	±0,5	1	±1	2	5	10	20						
PA-25Y	-1										1	±1	2	5	10	20	50	100	200	400	600	1000
PAA-25Y									0,5		1		2	5	10	20	50	100	200	400	600	1000
Overpressure	4	4	4	4	4	4	4	4	4	4	4	12	12	40	40	80	100	200	300	1100*	1100	1100

PR: Vented Gauge. Zero at atmospheric pressure

PA: Sealed Gauge. Zero at 1000 mbar abs.

PAA: Absolute. Zero at vacuum

*for 25Y: up to 600 bar

Pressure Range	Accuracy ¹⁾	Error Band @ 0...50 °C ²⁾		Error Band @ -10...80 °C ²⁾	
		typ.	max.	typ.	max.
> 2...1000 bar	±0,25 %FS	±0,3 %FS	±0,5 %FS	±0,4 %FS	±0,7 %FS
> 0,3...2 bar	±0,25 %FS	±0,6 %FS	±1,0 %FS	±0,8 %FS	±1,5 %FS
0,1...0,3 bar ³⁾	±0,50 %FS	±2 mbar	±3 mbar	±2,5 mbar	±4,5 mbar

¹⁾ Linearity (best straight line) + Hysteresis + Repeatability²⁾ Accuracy + Temperature Coefficient + Zero + Span Tolerance³⁾ Pressure Range 0,1 bar: Linearity ±1 %FS Max; 0,5...4,5 V output not available; 4...20 mA / 0...5 V / 0...10 V outputs only.⁴⁾ Measuring range 1000 bar only suited for static applications

Storage-/Operating Temperature -40...100 °C

Long Term Stability Range > 2 bar 0,1 %FS typ. 0,2 %FS max.
 Range ≤ 2 bar 2 mbar typ. 4 mbar max.

Type	2-wire	3-wire	3-wire	3-wire
Signal Output	4...20 mA	0...10 V	0...5 V	0,5...4,5 V
Limitation Signal Output	3,2...22,3 mA	-1,2...11,2 V	-0,6...5,6 V	0,1...4,9 V
Supply	8...32 VDC	13...32 VDC	8...32 VDC	8...32 VDC
Load Resistance	< (U-8 V) / 0,025 A	> 5 kΩ	> 5 kΩ	> 5 kΩ
Limiting Frequency	2 kHz	2 kHz	2 kHz	2 kHz
Power Consumption		max. 5 mA	max. 5 mA	max. 4 mA

Electrical Connection

Plug / Cable	Protection ⁵⁾	Female connector
Binder-423/723 (5-wire)	IP40	Incl. in delivery, IP67 ⁶⁾ optional
GSP EN 175 301-803-A (DIN 43650)	IP65 ⁶⁾	Incl. in delivery
M12 (4-wire)	IP67 ⁷⁾	Optional with connection cable
Souriau (MIL-C26482)	IP65 ⁶⁾	Optional
Cable (max. 80 °C)	IP54	
Cable gland	IP68	

⁵⁾ with corresponding mating plug ⁶⁾ Use cable with integrated reference hose for PR version ⁷⁾ with PR version IP54

Pressure Connection

Series 23SY: G1/4", 1/4"-18NPT, G1/2", G1/2" Mano

Series 25Y: G1/2"

Response Time (Supply ON)

(0...99 %) < 5 ms

Insulation

> 10 MΩ@300 V

EMC

EN 61000-6-2: 2005 / EN 61000-6-3: 2007 / EN 61326-2-3: 2006

Dead Volume Change

< 0,1 mm³

Material in Media Contact

- Stainless Steel AISI 316L (1.4404/1.4435); 25wY > 400 bar: Inconel 718

- USIT or Viton[®] O-Ring (no internal seals)

Weight

≈ 120 g (depending on version)

Endurance

> 10 million cycles, 0...100 %FS at 25 °C⁴⁾

Oil Filling

Silicone oil

Options

Temperature Range

Other temperature ranges on request. Maximal range: -40...+120 °C

Oil Filling

Fluorocarbon oil (O₂-compatible), olive-oil, lowest temperature oil (-55 °C)

Pressure Ranges

Intermediate ranges on request, e.g. barometer 0,7...1,2 bar abs.

Pressure Connection, Electrical Connection

Others on request

Intrinsic Safety (ATEX)

See also data sheet 23SYEi / 25YEi / 26YEi